

STC-CB / Full Stirrup with Stem Post Support




STC stainless steel post shoes are suitable for bolting onto and setting into concrete. STC have the largest range of stainless steel post anchors in the UK, we have leg sizes ranging from 75 mm to 600 mm and full stirrup saddle sizes to suit timber posts from 90 mm up to 200 mm square. Bespoke sizes available on request.

Application and Specification

- 6.00 mm thick stainless steel
- Extra heavy-duty shaft
- Bolt holes
- Welded construction
- Available in grade 304 and 316 stainless steel
- Post stirrup to suit from 90 mm up to 200 mm square posts
- Post support leg sizes from 75 mm to 600 mm
- Post support either bolted onto concrete or concreted in

Top Cup Show with Stem Post Support (all dimensions in mm)

Product Code	Stirrup Size A	Base Plate B	Stirrup Width C	Stirrup Height D	Plate Thickness	No. of Holes in Base Plate	No of Holes in Stirrup	Base Height E	Base Hole Sizes	Saddle Hole Sizes	Tube Dia. / Wall Thickness
STC-FS9075	90	90 × 90	75	105	6	4	2	75	M10 / 12	M12 / 14	33.4 / 3.38
STC-FS90130	90	90 × 90	75	105	6	4	2	130	M10 / 12	M12 / 14	33.4 / 3.38
STC-FS90150	90	90 × 90	75	105	6	4	2	150	M10 / 12	M12 / 14	33.4 / 3.38
STC-FS90200	90	90 × 90	75	105	6	4	2	200	M10 / 12	M12 / 14	33.4 / 3.38
STC-FS90250	90	90 × 90	75	105	6	4	2	250	M10 / 12	M12 / 14	33.4 / 3.38
STC-FS90300	90	90 × 90	75	105	6	4	2	300	M10 / 12	M12 / 14	33.4 / 3.38
STC-FS90375	90	90 × 90	75	105	6	4	2	375	M10 / 12	M12 / 14	33.4 / 3.38
STC-FS90450	90	90 × 90	75	105	6	4	2	450	M10 / 12	M12 / 14	33.4 / 3.38
STC-FS90600	90	90 × 90	75	105	6	4	2	600	M10 / 12	M12 / 14	33.4 / 3.38
STC-FS10075	100	100 × 100	85	105	6	4	2	75	M10 / 12	M12 / 14	33.4 / 3.38
STC-FS100130	100	100 × 100	85	105	6	4	2	130	M10 / 12	M12 / 14	33.4 / 3.38
STC-FS100150	100	100 × 100	85	105	6	4	2	150	M10 / 12	M12 / 14	33.4 / 3.38
STC-FS100200	100	100 × 100	85	105	6	4	2	200	M10 / 12	M12 / 14	33.4 / 3.38
STC-FS100250	100	100 × 100	85	105	6	4	2	250	M10 / 12	M12 / 14	33.4 / 3.38
STC-FS100300	100	100 × 100	85	105	6	4	2	300	M10 / 12	M12 / 14	33.4 / 3.38
STC-FS100450	100	100 × 100	85	105	6	4	2	450	M10 / 12	M12 / 14	33.4 / 3.38
STC-FS100600	100	100 × 100	85	105	6	4	2	600	M10 / 12	M12 / 14	33.4 / 3.38

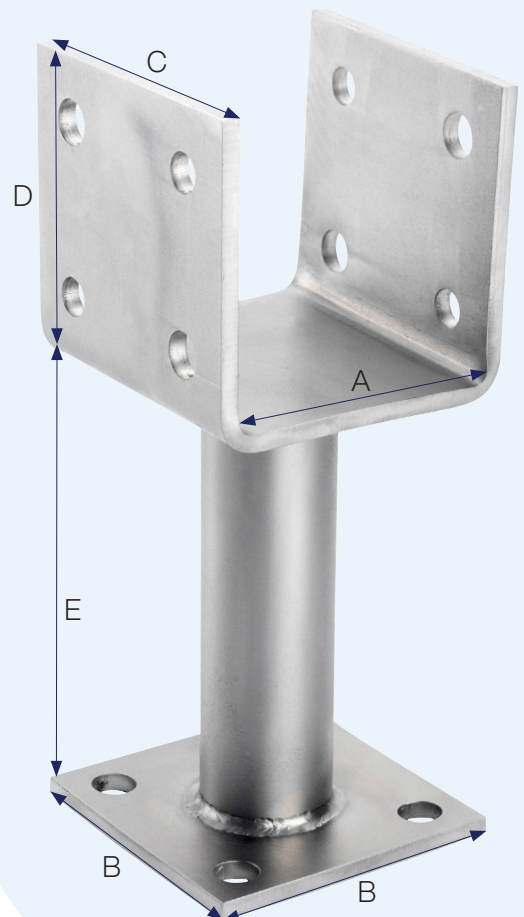

Top Cup Show with Stem Post Support (all dimensions in mm)

Product Code	Stirrup Size A	Base Plate B	Stirrup Width C	Stirrup Height D	Plate Thickness	No. of Holes in Base Plate	No of Holes in Stirrup	Base Height E	Base Hole Sizes	Saddle Hole Sizes	Tube Dia. / Wall Thickness
STC-FS115130	115	100	95	105	6	4	2	130	M12 / 14	M12 / 14	33.4 / 3.38
STC-FS115200	115	100	95	105	6	4	2	200	M12 / 14	M12 / 14	33.4 / 3.38
STC-FS115300	115	100	95	105	6	4	2	300	M12 / 14	M12 / 14	33.4 / 3.38
STC-FS115450	115	100	95	105	6	4	2	450	M12 / 14	M12 / 14	33.4 / 3.38
STC-FS125130	125	110	105	105	6	4	2	130	M12 / 14	M16 / 18	42.2 / 3.56
STC-FS125150	125	110	105	105	6	4	2	150	M12 / 14	M16 / 18	42.2 / 3.56
STC-FS125200	125	110	105	105	6	4	2	200	M12 / 14	M16 / 18	42.2 / 3.56
STC-FS125300	125	110	105	105	6	4	2	300	M12 / 14	M16 / 18	42.2 / 3.56
STC-FS125450	125	110	105	105	6	4	2	450	M12 / 14	M16 / 18	42.2 / 3.56
STC-FS135130	135	110	115	105	6	4	2	130	M12 / 14	M16 / 18	42.2 / 3.56
STC-FS135150	135	110	115	105	6	4	2	150	M12 / 14	M16 / 18	42.2 / 3.56
STC-FS135200	135	110	115	105	6	4	2	200	M12 / 14	M16 / 18	42.2 / 3.56
STC-FS135300	135	110	115	105	6	4	2	300	M12 / 14	M16 / 18	42.2 / 3.56
STC-FS135450	135	110	115	105	6	4	2	450	M12 / 14	M16 / 18	42.2 / 3.56
STC-FS140200	140	110	120	105	6	4	2	200	M12 / 14	M16 / 18	42.2 / 3.56
STC-FS140250	140	110	120	105	6	4	2	250	M12 / 14	M16 / 18	42.2 / 3.56
STC-FS140300	140	110	120	105	6	4	2	300	M12 / 14	M16 / 18	42.2 / 3.56
STC-FS140400	140	110	120	105	6	4	2	400	M12 / 14	M16 / 18	42.2 / 3.56
STC-FS140500	140	110	120	105	6	4	2	500	M12 / 14	M16 / 18	42.2 / 3.56
STC-FS150200	150	120	130	125	6	4	2	200	M12 / 14	M16 / 18	48.3 / 3.68
STC-FS150250	150	120	130	125	6	4	2	250	M12 / 14	M16 / 18	48.3 / 3.68
STC-FS150300	150	120	130	125	6	4	2	300	M12 / 14	M16 / 18	48.3 / 3.68
STC-FS150400	150	120	130	125	6	4	2	400	M12 / 14	M16 / 18	48.3 / 3.68
STC-FS150500	150	120	130	125	6	4	2	500	M12 / 14	M16 / 18	48.3 / 3.68
STC-FS180250	180	150	150	125	6	4	4	250	M12 / 14	M20 / 22	48.3 / 3.68
STC-FS180300	180	150	150	125	6	4	4	300	M12 / 14	M20 / 22	48.3 / 3.68
STC-FS180400	180	150	150	125	6	4	4	400	M12 / 14	M20 / 22	48.3 / 3.68
STC-FS180500	180	150	150	125	6	4	4	500	M12 / 14	M20 / 22	48.3 / 3.68
STC-FS200250	200	170	170	125	6	4	4	250	M12 / 14	M20 / 22	60.3 / 3.91
STC-FS200300	200	170	170	125	6	4	4	300	M12 / 14	M20 / 22	60.3 / 3.91
STC-FS200400	200	170	170	125	6	4	4	400	M12 / 14	M20 / 22	60.3 / 3.91
STC-FS200500	200	170	170	125	6	4	4	500	M12 / 14	M20 / 22	60.3 / 3.91