

STC-HC / Half Cup Shoe Post Support




Stainless UK's Half Cup Shoe Post Support provide a solution when access can be an issue during installation.

Specification

- Mechanical post fixing for timber framed structures
- All products manufactured in accordance with BS EN 1090-2 Load Bearing and Structural Steel Components
- Post support either bolted onto concrete or concreted in
- 75–600 mm height range
- Available in grade 304 and 316 stainless steel
- Full range of accessories from threaded end studs and rebar, throughbolts, pig nose connectors and brackets
- Bespoke products available

Half Cup Post Support (all dimensions in mm)

Product Code	Stirrup Width A	Base Plate B	Cup Length C	Cup Height D	Plate Thickness	No. of Holes in Base Plate	No of Holes in Stirrup	Base Height E	Base Hole Sizes	Saddle Hole Sizes	Tube Dia. / Wall Thickness
STC-HC9075	90	90 × 90	75	105	6	4	4	75	M10 / 12	M12 / 14	33.4 / 3.38
STC-HC90130	90	90 × 90	75	105	6	4	4	130	M10 / 12	M12 / 14	33.4 / 3.38
STC-HC90150	90	90 × 90	75	105	6	4	4	150	M10 / 12	M12 / 14	33.4 / 3.38
STC-HC90200	90	90 × 90	75	105	6	4	4	200	M10 / 12	M12 / 14	33.4 / 3.38
STC-HC90250	90	90 × 90	75	105	6	4	4	250	M10 / 12	M12 / 14	33.4 / 3.38
STC-HC90300	90	90 × 90	75	105	6	4	4	300	M10 / 12	M12 / 14	33.4 / 3.38
STC-HC90375	90	90 × 90	75	105	6	4	4	375	M10 / 12	M12 / 14	33.4 / 3.38
STC-HC90450	90	90 × 90	75	105	6	4	4	450	M10 / 12	M12 / 14	33.4 / 3.38
STC-HC90600	90	90 × 90	75	105	6	4	4	600	M10 / 12	M12 / 14	33.4 / 3.38
STC-HC10075	100	100 × 100	85	105	6	4	4	75	M10 / 12	M12 / 14	33.4 / 3.38
STC-HC100130	100	100 × 100	85	105	6	4	4	130	M10 / 12	M12 / 14	33.4 / 3.38
STC-HC100150	100	100 × 100	85	105	6	4	4	150	M10 / 12	M12 / 14	33.4 / 3.38
STC-HC100200	100	100 × 100	85	105	6	4	4	200	M10 / 12	M12 / 14	33.4 / 3.38
STC-HC100250	100	100 × 100	85	105	6	4	4	250	M10 / 12	M12 / 14	33.4 / 3.38
STC-HC100300	100	100 × 100	85	105	6	4	4	300	M10 / 12	M12 / 14	33.4 / 3.38
STC-HC100450	100	100 × 100	85	105	6	4	4	450	M10 / 12	M12 / 14	33.4 / 3.38
STC-HC100600	100	100 × 100	85	105	6	4	4	600	M10 / 12	M12 / 14	33.4 / 3.38

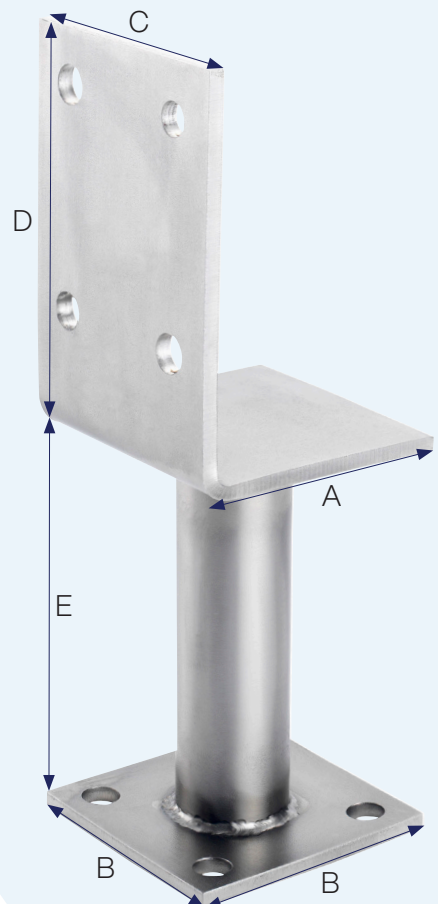

Half Cup Post Support (all dimensions in mm)

Product Code	Stirrup Width A	Base Plate B	Cup Length C	Cup Height D	Plate Thickness	No. of Holes in Base Plate	No of Holes in Stirrup	Base Height E	Base Hole Sizes	Saddle Hole Sizes	Tube Dia. / Wall Thickness
STC-HC115130	115	100	95	105	6	4	4	130	M12 / 14	M12 / 14	33.4 / 3.38
STC-HC115200	115	100	95	105	6	4	4	200	M12 / 14	M12 / 14	33.4 / 3.38
STC-HC115300	115	100	95	105	6	4	4	300	M12 / 14	M12 / 14	33.4 / 3.38
STC-HC115450	115	100	95	105	6	4	4	450	M12 / 14	M12 / 14	33.4 / 3.38
STC-HC125130	125	110	105	105	6	4	4	130	M12 / 14	M16 / 18	42.2 / 3.56
STC-HC125150	125	110	105	105	6	4	4	150	M12 / 14	M16 / 18	42.2 / 3.56
STC-HC125200	125	110	105	105	6	4	4	200	M12 / 14	M16 / 18	42.2 / 3.56
STC-HC125300	125	110	105	105	6	4	4	300	M12 / 14	M16 / 18	42.2 / 3.56
STC-HC125450	125	110	105	105	6	4	4	450	M12 / 14	M16 / 18	42.2 / 3.56
STC-HC135130	135	110	115	105	6	4	4	130	M12 / 14	M16 / 18	42.2 / 3.56
STC-HC135150	135	110	115	105	6	4	4	150	M12 / 14	M16 / 18	42.2 / 3.56
STC-HC135200	135	110	115	105	6	4	4	200	M12 / 14	M16 / 18	42.2 / 3.56
STC-HC135300	135	110	115	105	6	4	4	300	M12 / 14	M16 / 18	42.2 / 3.56
STC-HC135450	135	110	115	105	6	4	4	450	M12 / 14	M16 / 18	42.2 / 3.56
STC-HC140200	140	110	120	105	6	4	4	200	M12 / 14	M16 / 18	42.2 / 3.56
STC-HC140250	140	110	120	105	6	4	4	250	M12 / 14	M16 / 18	42.2 / 3.56
STC-HC140300	140	110	120	105	6	4	4	300	M12 / 14	M16 / 18	42.2 / 3.56
STC-HC140400	140	110	120	105	6	4	4	400	M12 / 14	M16 / 18	42.2 / 3.56
STC-HC140500	140	110	120	105	6	4	4	500	M12 / 14	M16 / 18	42.2 / 3.56
STC-HC150200	150	120	130	125	6	4	4	200	M12 / 14	M16 / 18	48.3 / 3.68
STC-HC150250	150	120	130	125	6	4	4	250	M12 / 14	M16 / 18	48.3 / 3.68
STC-HC150300	150	120	130	125	6	4	4	300	M12 / 14	M16 / 18	48.3 / 3.68
STC-HC150400	150	120	130	125	6	4	4	400	M12 / 14	M16 / 18	48.3 / 3.68
STC-HC150500	150	120	130	125	6	4	4	500	M12 / 14	M16 / 18	48.3 / 3.68
STC-HC180250	180	150	150	125	6	4	4	250	M12 / 14	M20 / 22	48.3 / 3.68
STC-HC180300	180	150	150	125	6	4	4	300	M12 / 14	M20 / 22	48.3 / 3.68
STC-HC180400	180	150	150	125	6	4	4	400	M12 / 14	M20 / 22	48.3 / 3.68
STC-HC180500	180	150	150	125	6	4	4	500	M12 / 14	M20 / 22	48.3 / 3.68
STC-HC200250	200	170	170	125	6	4	4	250	M12 / 14	M20 / 22	60.3 / 3.91
STC-HC200300	200	170	170	125	6	4	4	300	M12 / 14	M20 / 22	60.3 / 3.91
STC-HC200400	200	170	170	125	6	4	4	400	M12 / 14	M20 / 22	60.3 / 3.91
STC-HC200500	200	170	170	125	6	4	4	500	M12 / 14	M20 / 22	60.3 / 3.91